

# Manual Swing Type Fire Hose Reels - Die Cast



EH-25-SDM-12GI

\* **Note:** SIRIM & Bomba approved

\*\***Note:** Bomba approved  
PSB approved  
CE marked



EH-25-SDM-09GI




EH-25-SDL-12GI




EH-19-SDM-09GI

Technical Data			DIE CAST	
ORDERING CODE	**EH25-SDM-12GI	*EH25-SDM-09GI	EH25-SDL-12GI	EH19-SDM-09GI
Disc Dia	565	565	650	565
Hose	25 x 30m	25 x 30m	25 x 30m	19 x 30m
Swing dim. A x B x C	520 x 565 x 190	520 x 565 x 190	490 x 650 x 160	490 x 565 x 160
Close dim. A' x B x C	280 x 565 x 190	280 x 565 x 190	250 x 650 x 160	250 x 565 x 160
Recess dim. L x W x D	760 x 760 x 320	760 x 760 x 320	760 x 760 x 290	760 x 760 x 290
Working/ Test Pressure	12 bar / 18 bar	12 bar / 18 bar	12 bar / 18 bar	12 bar / 18 bar
Minimum Flow Rate	34 L/ min	34 L/ min	34 L/ min	28 L/ min
Drum Finishing	Red (RAL3000) Epoxy Polyester Electrostatic Powder Coating			
Design & Manufacture to	BS EN 671-1:2001			


*Note: All dimensions in millimetre unless otherwise specified  
Brass Jet/Spray Nozzle also available upon request*



SWING



CLOSE



RECESS

# Manual Swing Type Fire Hose Reels - Hose Inlet



EH-25-SHM-09BR



EH-25-SHL-12BR



EH-19-SHM-09BR




\***Note:** PSB approved  
CE marked


\***Note:** PSB approved  
CE marked pending

Technical Data		HOSE INLET		
ORDERING CODE	**EH25-SHM-09BR	**EH25-SHL-12BR	*EH19-SHM-09BR	
Disc Dia	565	650	565	
Inlet Hose Connection	25 x 1.0m	25 x 1.5m	25 x 1.0m	
Hose	25 x 30m	25 x 30m	19 x 30m	
Swing dim. A x B x C	575 x 565 x 190	635 x 650 x 160	550 x 565 x 160	
Close dim. A' x B x C	290 x 565 x 190	295 x 650 x 160	270 x 565 x 160	
Recess dim. L x W x D	700 x 700 x 290	760 x 760 x 250	700 x 700 x 250	
Working/ Test Pressure	12 bar / 18 bar	12 bar / 18 bar	12 bar / 18 bar	
Minimum Flow Rate	34 L/ min	34 L/ min	28 L/ min	
Drum Finishing	Red (RAL3000) Epoxy Polyester Electrostatic Powder Coating			
Design & Manufacture to	BS EN 671-1:2001			


*Note: All dimensions in millimetre unless otherwise specified  
Brass Jet/Spray Nozzle also available upon request*



SWING



CLOSE



RECESS

# Manual Fixed Type Fire Hose Reels - Fixed Pipe




EH-25-FPM-09BR



EH-25-FPL-12BR



EH-19-FPM-09BR



Technical Data		FIXED PIPE TYPE		
ORDERING CODE	**EH25-FPM-09BR	EH25-FPL-12BR	*EH19-FPM-09BR	
Disc Dia	565	650	565	
Hose	25 x 30m	25 x 30m	19 x 30m	
Dim. A x B x C	565 x 190 x 265	650 x 160 x 235	565 x 160 x 235	
Working/ Test Pressure	12 bar / 18 bar	2 bar / 18 bar	2 bar / 18 bar	
Minimum Flow Rate	34 L/ min	34 L/ min	28 L/ min	
Drum Finishing	Red (RAL3000) Epoxy Polyester Electrostatic Powder Coating			
Design & Manufacture to	BS EN 671-1:2001			



**\*\*Note:** PSB approved  
CE marked


**\* Note:** PSB approved  
CE marked pending

*Note: All dimensions in millimetre unless otherwise specified  
Brass Jet/Spray Nozzle also available upon request*

## Australian Standard - Fixed Type




MODEL NO.	EH-19FP
Material - Drum	Mild Steel
Material - Waterway	Galvanised Steel Pipe & Brass Axle
Hose	PVC Reinforced Nylon
Test Pressure	1.7MPa
Inlet Connection	1" BSP Female
Working Pressure	1.0 MPa max.
Flow Rate (min)	0.45 Lit/Sec at 220 kPa
Hose Length	30/36 metre
Hose Internal Diameter	19 mm
Reel Diameter	565 mm
Weight	26.0 kg
Paint Finishing	Signal Red AS 2700
Design & Manufacture To	AS/NZS 1221:1997

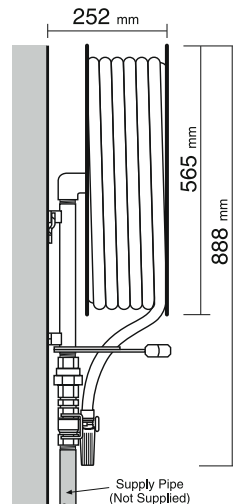

# Automatic Swing Type Fire Hose Reels - Hose Inlet



EH-25-SAL-12BR

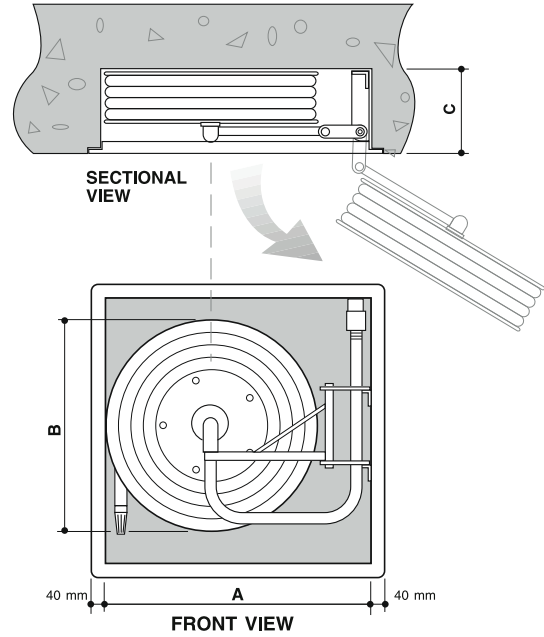

**\*\*Note:** PSB approved  
CE marked



**EVERSAFE®** range of automatic fire hose reels is designed and manufactured to meet the stringent requirements of **EN 671-1** standards to guarantee excellent performance, durability and protection. The automatic fire hose reels are equipped with “shut-off” valve which is built into the hose reel unit. The “shut-off” valve will automatically open after 3 revolutions upon pulling out the hose. The valve remains open throughout its operation and will automatically closed when wound in reverse direction for more than 3 revolutions.




EH-25-SAM-09BR




EH-19-SAM-09BR

Technical Data	HOSE INLET		
<b>ORDERING CODE</b>	<b>**EH25-SAL-12BR</b>	<b>**EH25-SAM-09BR</b>	<b>EH19-SAM-09BR</b>
Disc Dia	650	565	565
Inlet Hose Connection	25 x 1.5m	25 x 1.0m	25 x 1.0m
Hose	25 x 30m	25 x 30m	19 x 30m
Swing dim. A x B x C	635 x 650 x 160	570 x 565 x 190	550 x 565 x 160
Close dim. A' x B x C	295 x 650 x 160	290 x 565 x 190	270 x 565 x 160
Recess dim. L x W x D	760 x 760 x 250	700 x 700 x 290	700 x 700 x 250
Working/ Test Pressure	12 bar / 18 bar	12 bar / 18 bar	12 bar / 18 bar
Minimum Flow Rate	34 L/ min	34 L/ min	28 L/ min
Drum Finishing	Red (RAL3000) Epoxy Polyester Electrostatic Powder Coating		
Design & Manufacture to	BS EN 671-1:2001		


*Note: All dimensions in millimetre unless otherwise specified  
Brass Jet/Spray Nozzle also available upon request*



CLOSE



RECESS



SWING